


Oxygen Pressure Regulators **Heavy-Duty Series**



#1836GBHF-25GP

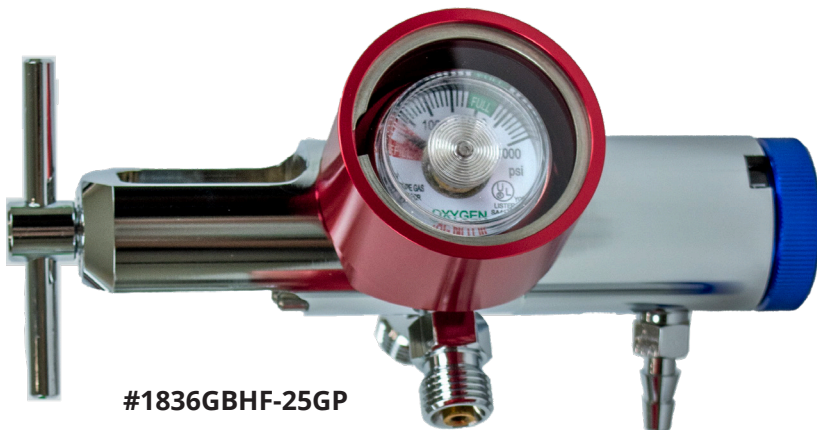

#R1836GB-25GP

All-brass body designed for superior safety and durability. Experience unmatched performance with our new heavy-duty oxygen regulators, designed to outperform the competition. Here's why they are the top choice for your emergency requirements:



- Regulator bodies are engineered for maximum strength, ensuring longevity and reliability even in the toughest environments.
- 5-year limited warranty, showcasing our confidence in the product's quality and performance.
- Low-profile pressure gauges are shock-resistant and protected by metal casing.
- Comes with or without 2 DISS check valves.
- Precise control over 11 flow positions by adjusting the metal flow knob.

SPECIFICATIONS

Supply Pressure	500 to 2200 psi
Outlet Pressure	High flow outlets: 40 to 60 psi at 500 to 2200 psi inlet pressure
Flow Capacity	High flow outlets: 125 lpm minimum single or combined flow with 500 psi inlet pressure. Constant flow outlet selections: 0-25 lpm: 0, ¼, ½, 1, 2, 3, 4, 6, 8, 10, 15, 25
Filter	20 micron sintered bronze
Safety Relief Pressure	75 to 125 psi
Operating Temperature	-30° F to 125° F
Storage Temperature	-20° F to 120° F
Materials	Body: Chrome-plated brass Knob: Anodized aluminum Outlets: Nickel-plated brass Internal parts: Brass, stainless steel, Viton®, silicon and Teflon®

ORDERING INFORMATION

R1836GBHF-25GP	0-25 LPM with gauge, 2 check valves, hose barb outlet
R1836GB-25GP	0-25 LPM with gauge, hose barb outlet

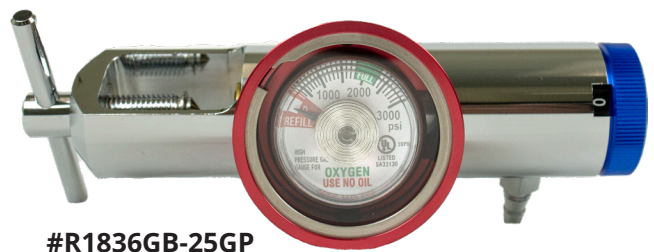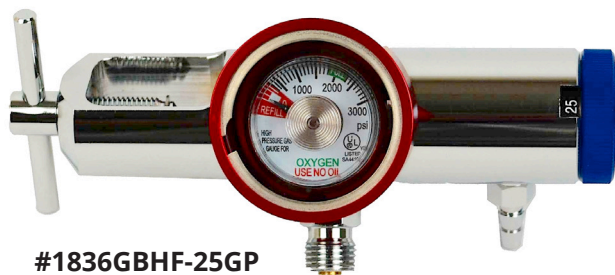

WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov